

Nimishillen Township

4915 N. Nickelplate
Louisville, OH 44641
330-875-9924

CULVERT PERMIT

When building in Nimishillen Township, culvert permits for driveways are required where curbs and underground drainage do not exist. This provides notice to the Township Road Department of construction affecting township drainage and allows the Township Road Department the opportunity to work with the builder to protect and/or improve the drainage

Property Owner(s) _____			
Mailing Address _____			
Street Address	City	State	Zip Code
Telephone Number _____		Email Address _____	
Culvert Location _____			
Street Address	City	State	Zip Code

Contractor's Name _____			
Mailing Address _____			
Street Address	City	State	Zip Code
Telephone Number _____		Email Address _____	

NOTE: Please notify Nimishillen Township Road Department at 330-875-3511 when the work is being done. THIS PERMIT IS VOID IF WORK IS NOT COMPLETED WITHIN NINETY (90) DAYS.

By signing, I acknowledged I have received and agree to the Driveway Apron Installation Regulations. I understand this permit is good only for the above address for the culvert specified by Nimishillen Township.

Applicant's Signature: _____

For office use only	
Permit # _____	
To install _____ diameter culvert at above address (Dual wall smooth flow pipe 20' to 30')	
By: _____	Date Granted _____
Zoning Inspector Signature	

DRIVEWAY APRON INSTALLATION REGULATIONS

Supplemental to Road Opening or Zoning Permit

Corresponding Permit No. _____

Date:

1. Individual or Contractor must:

(a) Not use Portland Cement Concrete in the right-of-way between the property line and road edge where no concrete curbing exists. The use of Portland cement concrete seriously affects maintenance of utilities and drainage on this right-of-way. Concrete is permitted if concrete curb exists.

(b) Maintain 5' away from roadway for apron. Make all aprons to join the road surface no higher than the road edge with a slope no greater than 3/8" on the right-of-way. Improper drive aprons can seriously damage the drive, equipment, and personnel if struck during snow removal and maintenance.

(c) Clean the area and remove any excess debris to the property line.

2. The Contractor shall protect traffic at all times during the progress of the work and will use proper barricades, signs, and lights so as to protect and provide safety of the general public.

3. The applicant and contractor agree to keep the roadway free of debris and cleared of mud. It is requested that gravel be installed on the driveway during construction to keep mud from the road. If the roadway is not kept clean and clear, the Township will attempt to notify the permit holder. However, when necessary to protect the public safety, the obstruction will be removed and the roadway cleaned with the cost being charged against the permit holder.

4. The applicant and contractor also agree to save Nimishillen Township and the Board of Trustees free and harmless from any and all claims to persons or property which might arise as a result of this work.

5. It is further agreed that the Owner or Contractor will pay for extra work required preparing the ditch openings if not left in satisfactory condition.

6. Any contractor failing to comply with the provisions of this permit will not be issued any further permits.


7. The Owner and Contractor are subject to the penalty established in Section 5571.99 of the Revised Code if they fail to comply with the conditions set forth in this permit and other penalties provided by law.

8. The permit is void if work is not completed within (90) days from date permit is granted.

(Revised 8/3/12)


Nimishillen Township Installation of drives or piping

Drives

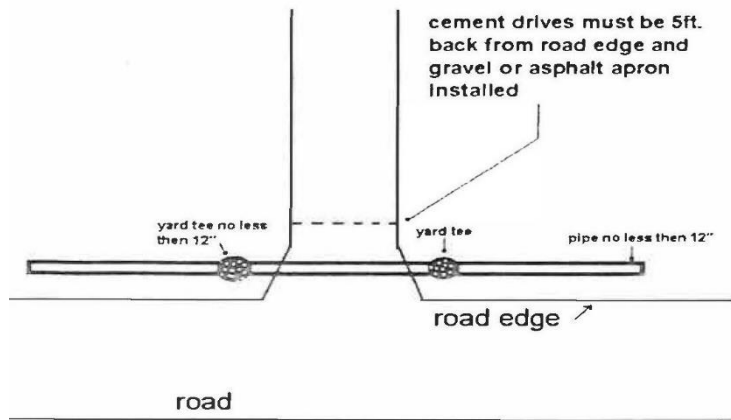


If continuing pipe outside of driveway, yard tees must be installed either side and not less than 12", in some cases the yard tees and pipe may have to be larger. TWP Highway Superintendent will advise.

Grade after installation of pipe in ditch

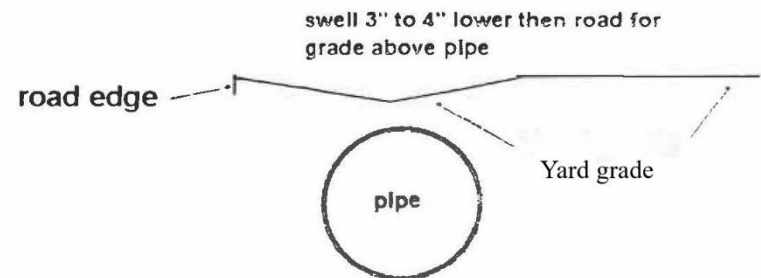

Pipe no less than 12" or in some cases pipe may have to be larger. TWP Highway Superintendent will advise.

Yard tees or catch basins

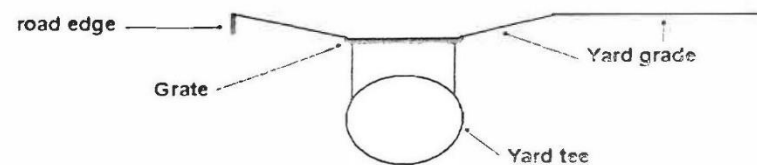

Yard tee or catch basin must be installed every 50ft to catch road and yard water.